



VERTICAL VERSION




HORIZONTAL VERSION




DOOR ASSEMBLY



1- ALIGN THE 4 DOOR HINGES WITH THE BOX HINGES

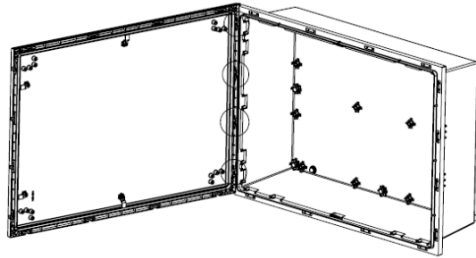


2- PUSH DOWN THE DOOR OPENED 45°-90° TO INSERT THE DOOR HINGES INTO THE BOX HINGES

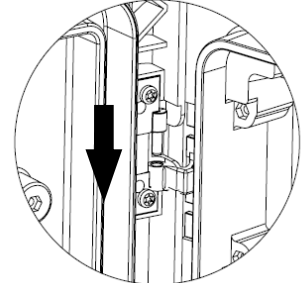

3- INSPECT VISUALLY THE 4 HINGES TO ENSURE THAT ALL OF THEM ARE CORRECTLY PLACED


* TO REMOVE THE DOOR, PUSH IT UPWARDS

DO NOT PUSH DOWN OR LEAN ON THE DOOR. IT CAN BREAK THE HINGES.


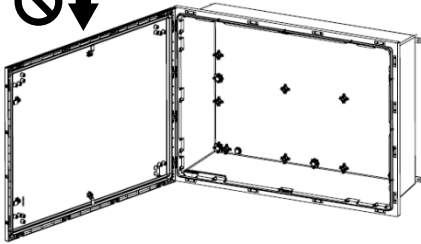


CAUTION

ONLY OPEN THE DOOR IN THE CORRECT OPERATING POSITION

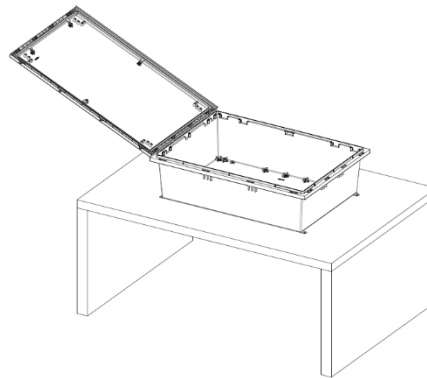


TAKE OFF THE DOOR WHEN HANDLING THE BOX TO PREVENT WIND TO CAUSE ANY DAMAGE. ALTERNATIVELY, YOU CAN USE THE DOOR RETENTION SYSTEM THAT CAN BE PURCHASED AS AN ACCESSORY

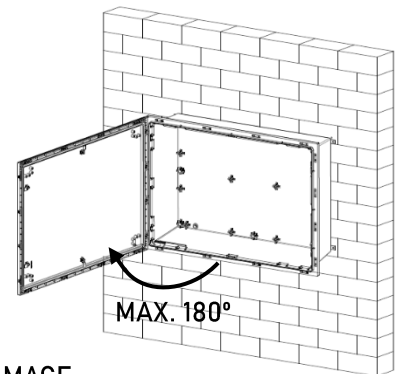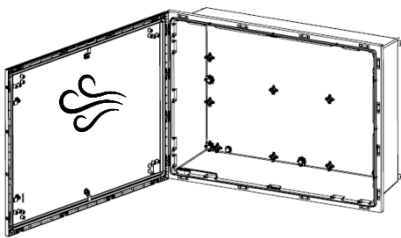


> 180° OR 50Nm CAN CAUSE DAMAGE

PLACE THE FIXATION PLATINS AT THE 4 CORNERS IN THE DESIRED ORIENTATION

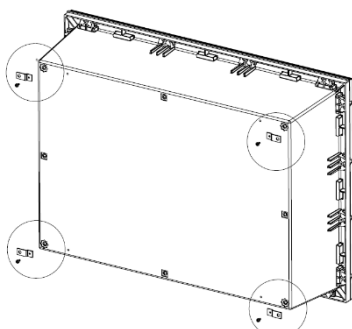


WALL MOUNT


OPTION 1




OPTION 2



OPTION 3



ENSURE A SCREW TORQUE OF 6Nm



THE 4 CENTRAL FIXATION POINTS ARE OPTIONAL AND CAN BE USED PURCHASING AN ADDITIONAL FIXATION ACCESSORIES BAG